

# 360PRO™

## HEAVY DUTY SURGE PROTECTOR



WITH **HEXACORE™** CONSTRUCTION



Thank you for buying a 360PRO™ Heavy Duty Surge Protector

We hope it delivers the power you need to get things done. 360PRO™ is designed and built to withstand tough jobs and environments. Now you can be the judge of that.

Before you get going, please read through this guide for helpful information on how to use your Surge Protector as well as detailed information on our warranties.

When you get a minute, head to our website to register your 360PRO™. Your registration will initiate your lifetime warranty as well as provide an opportunity to sign up for future product developments.

### TECHNICAL SPECIFICATIONS

**Model #:** 36003

**Electrical Ratings:** 15A, 120V, 60Hz, 1800W

**Surge Energy Joule Rating:** 1080 Joules

**Maximum Spike Current:** 72,000A

**Clamping Voltage:** 500V

**Response Time:** <1 Nanosecond

**Auto Shutdown:** Yes

**EMI/RFI:** 40dB from 150KHz to 100MHz

**UL:** 1449, 1363

### CAUTION

Use indoors only and do not use near water.

Do not plug any extension cord, powerstrip, wall tap, or multi-outlet adapter into your Surge Protector.

Do not plug your Surge Protector into anything but a grounded (three prong) outlet.

Do not plug devices into your Surge Protector that will exceed the electrical ratings. (See technical specifications.)

Do not use your Surge Protector with a heater, generator, convection oven, conventional oven, microwave, sump pump, water-related device or vehicle battery charger.

Quit using your Surge Protector if either green or red indicator light is not on. (See Using Your 360PRO™ for more information.)

Do not alter or repair your Surge Protector. Doing so is dangerous and will void the warranty.

### USING YOUR 360PRO™

**A 6 AC Outlets** – Power and protect all your tools and devices.

**B Green “grounded” Light** – Lets you know the outlet you’re plugged into is grounded. If this light doesn’t come on, use a different outlet.


**C Red “protected” Light** – When lit indicates that your devices are protected. If it is not lit, your Surge Protector has absorbed a large surge and sacrificed itself to save your electronics.

**D Advanced Surge Protection** - 1080 Joules of protection from power surges and spikes.

**E Power/Reset Switch** – Power switch is also a reset breaker switch in case your Surge Protector becomes overloaded.

**F 8' Yellow Power Cord** – Added length puts power where you need it and highly visible color helps minimize tripping hazards.

**G 2 Adapter-Spaced Outlets** - Fit your bulky plugs here without covering other outlets.

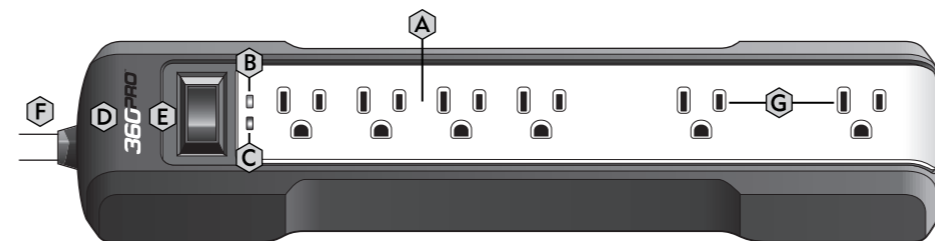

### WARRANTIES

#### LIMITED LIFETIME WARRANTY

The Limited Lifetime Warranty of this product—360PRO™ Heavy Duty Surge Protector. Model #36003 is subject to all of the conditions and exclusions contained in the articles below. This 360PRO™ Limited Lifetime Warranty gives you, the original purchaser, specific legal rights along with additional rights that apply in certain states. This Limited Lifetime Warranty applied only to the enclosed 360PRO™ model. 360 Electrical warrants to the verified original purchaser of this 360PRO™ Heavy Duty Surge Protector for the life of this product that there will be no defects in craftsmanship, materials, assembly or design. Should there be any defects in any of the categories listed above 360 Electrical will, at its sole discretion, repair or replace the defective Surge Protector at no cost to the original purchaser. The life of the Surge Protector is defined as the period of time that the Surge Protector has the capacity to protect against power surges and spikes. The “Protected” indicator light will no longer illuminate when this capacity is exceeded.

#### CONNECTED EQUIPMENT LIMITED WARRANTY

360 Electrical's Connected Equipment Warranty covers only equipment that is damaged or destroyed by transient voltage while properly connected to a properly wired AC power line with protective ground. Transient voltage or a “Power Disruption” is defined as a brief voltage spike and/or surge on the AC power. 360 Electrical, at its option, will pay the present fair market value for the replacement or repair of the damaged connected equipment up to the maximum amount stated below:

#### Item - 36003 | Up to a maximum of \$100,000.00

This is a Limited Warranty and is subject to the conditions and provisions contained in the following articles. This warranty is null and void if any of the following conditions exist: (a) the equipment is not properly connected to the Surge Protector, (b) the Power Disruption damages your equipment through phone, network or coaxial lines, (c) the Surge Protector has been improperly opened or installed or has been tampered with, (d) the damage was not a result of a Power Disruption or a Power Disruption never took place, (e) or the Surge Protector was not used under normal operating conditions in accordance with the user instructions or the original purchaser does not make a claim within 15 days from the date of the Power Disruption with the purchase receipt for the Surge Protector and equipment for which the claim is made. This Warranty does not

protect against acts of God (flooding, erosion or earthquake), war, vandalism, theft, normal wear and tear from use, depletion, obsolescence, abuse, damage from from brownouts or sags or equipment alteration.

This Warranty is null and void if any person or facility not authorized by 360 Electrical not protect against, and 360 Electrical, LLC is free from liability, the incidental, indirect, direct or consequential monetary damages occurring from the sale or use of the Surge Protector such as loss of revenue, sales and/or profits.

This Warranty is limited to the losses not covered by the original purchaser's home owner's insurance or renter's insurance and the original purchaser cannot seek duplicate coverage under this Warranty. 360 reserves the right, at its sole discretion, to review and investigate all of the conditions and provisions listed above and determine whether any or all conditions exist making the claim null and void.

#### HOW TO MAKE A CLAIM

To make a claim, visit 360electrical.com/360pro and provide the required information or follow the steps below.

- 1) Mail the Surge Protector, at your expense, to the address at the bottom of the page
- 2) Provide the part number for the Surge Protector
- 3) Mail (if applicable), at your expense, the equipment that was connected to the Surge Protector
- 4) Explain in writing the extent of the damage that occurred to the connected equipment
- 5) Provide the date of the occurrence
- 6) Provide a copy of the original purchase receipt for the Surge Protector and damaged equipment
- 7) State when and where the purchases were made (if not clearly marked on the receipt)
- 8) Provide evidence of damage to connected equipment (pictures, the equipment itself, etc.)

All claims must be made within 15 days of the Power Disruption and damage to the equipment. If claims are not made within 15 days of the Power Disruption, the claim is null and void.

If 360 Electrical determines that the Connected Equipment Limited Warranty covers the damaged equipment, and that the equipment was damaged as a result of the Surge Protector which is covered under the Limited Lifetime Warranty, 360 Electrical will either 1) authorize repair of the connected equipment, at a cost up to the maximum amount set forth on the packaging of the surge protector involved; 2) provide the consumer with an equivalent equipment replacement; or 3) reimburse the consumer for the present fair market value of the damaged connected equipment. The present fair market value of the equipment will be determined according to the current value specified in the most recent edition of the Orion Blue Book by Orion Research Corporation, Roger Rohrs - Publisher.

#### SEND CLAIMS TO:

Attn: Claims Department | 360 Electrical, LLC  
1935 East Vine Street, Suite 360  
Salt Lake City, UT 84121


Or call 801-364-4900 for assistance in forwarding equipment, purchase receipts, 360 Electrical Surge Protector and how to proceed with the claim.

360electrical.

©2015, 360 Electrical, LLC

36003

### MOUNTING DIAGRAM

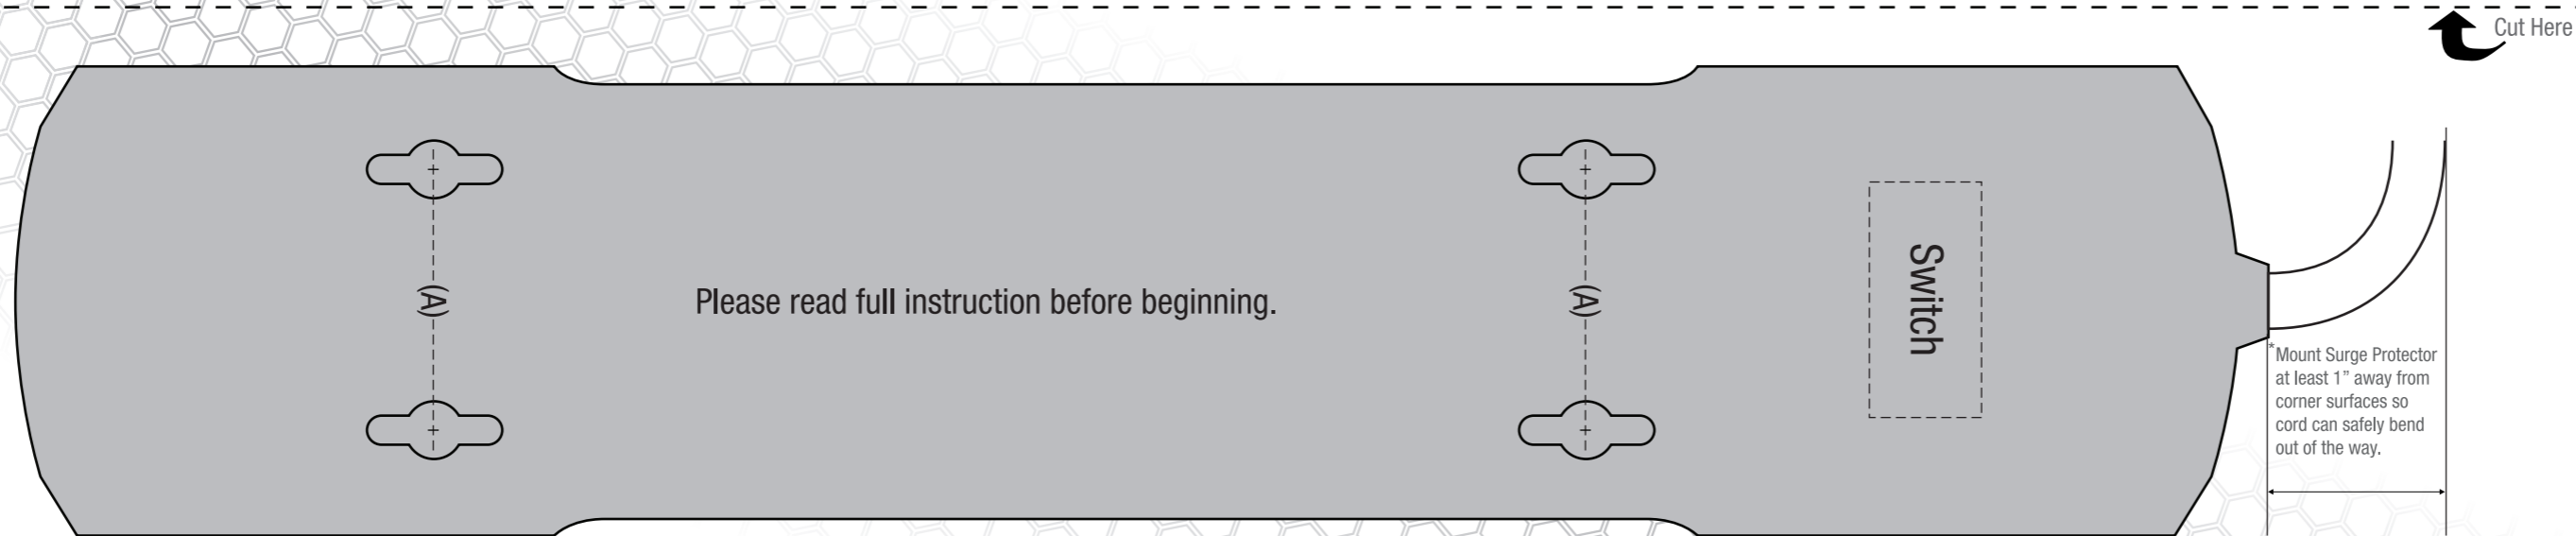

- 1 Cut along dashed line to separate Mounting Diagram for use.
- 2 Use tape to fix this diagram where you want the Surge Protector to mount. Make sure to position the switch in the direction you want and remember to leave room for the cord\*.
- 3 Lightly tap a small nail through the Mounting Diagram at locations marked (A) to transfer the screw locations onto your mounting surface.
- 4 Affix screws to all four marked locations leaving approximately 3/16" gap between screw head and surface.
- 5 Position Surge Protector over screws and slide 1/4" to lock it into place. Adjust screw heights to achieve a more secure mount if necessary.

360electrical.

360electrical.com/360Pro |