

Backlit Troffer


LED

15 watt 1' x 1' Backlit Troffer Specifications



The ETi Backlit LED Recessed Troffer offer a slim, low profile and easy to mount design. The luminaire provides for a brighter, lighter weight and more efficient replacement for standard fluorescent lay-in troffer used in recessed ceiling lights. Fixture is supplied with a 100-277v driver. Warranty period 5 years or 60 months. Suitable for installations from - 4° F to 104° F.

FIXTURE DIMENSIONS

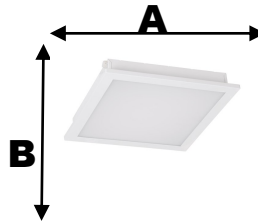

SKU# 54304141
Dimension A = 11.9"
Dimension B = 11.9"
Height = 2.5"
Does not include driver box



Driver box
Length = 8.0"
Width = 5.6"
Height = 1.8"

KEY FEATURES & BENEFITS

- 15 Watt Low Power and High Performance
- 900 Lumens
- Instant on/off
- Universal 100-277v driver
- UL- Damp Location rated
- UV, IR and Mercury-free
- Rated Lifetime: 80,000 hours



This light source meets restrictions on hazardous substances.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us/fcc15b

APPLICATION INFORMATION

Ideal one-for-one replacement of conventional linear fluorescent lay-in troffers. Applications include; offices, education environments, healthcare, hotels, retail stores & commercial buildings.



15 watt 1' x 1' Backlit Troffer LED

SPECIFICATION DATA

Project _____

Item Number _____


Prepared by _____ Date _____

ORDERING INFORMATION

Wattage	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	CRI ⁴	R9	Power Factor	THD	DUV	Operating Frequency	0-180° Spacing	90-270° Spacing
15	100-277	80,000	900	4000K	85	32.4	>=.95	<15%	.0012	50/60Hz	1.23	1.22
¹ Hours lifetime with 70% lumen maintenance												
² Thermally stable typical lumens (±10%)												
³ Thermally stable CCT (±10%)												
⁴ Color rendering index/Ra												

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54304141	836607008312	5.2" x 13.7" x 13.9"	4.2	N/A	N/A	N/A	N/A	4	50836607008317	19" x 22" x 14.6"	18.7

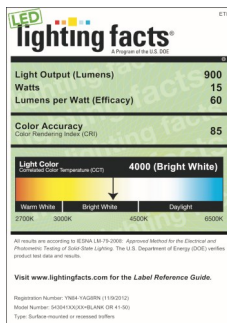

The Americas Headquarters, 26650 Renaissance Parkway, STE 6 Cleveland, OH 44128

855-384-7754 www.etiled.us

Backlit Troffer


LED

50 watt 2' x 2' Backlit Troffer Specifications



The ETi Backlit LED Recessed Troffer offer a slim, low profile and easy to mount design. The luminaire provides for a brighter, lighter weight and more efficient replacement for standard fluorescent lay-in troffer used in recessed ceiling lights. Fixture is supplied with a 100-277v driver. Warranty period 5 years or 60 months. Suitable for installations from - 4° F to 104° F.

FIXTURE DIMENSIONS

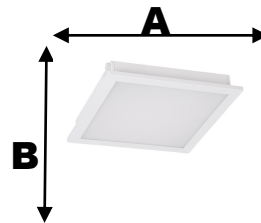

SKU# 54301141
Dimension A = 23.8"
Dimension B = 23.8"
Height = 2.5"
Does not include driver box



Driver box
Length = 8.0"
Width = 5.6"
Height = 1.8"

KEY FEATURES & BENEFITS

- 3500 Lumens
- Instant on/off
- Universal 100-277v driver
- UL– Damp Location rated
- UV, IR and Mercury-free
- Reported L₇₀ 84,000 hours @55° C
- DesignLights Consortium® qualified



This light source meets restrictions on hazardous substances.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us/fcc15b

APPLICATION INFORMATION

Ideal one-for-one replacement of conventional linear fluorescent lay-in troffers. Applications include; offices, education environments, healthcare, hotels, retail stores & commercial buildings.



50w 2' x 2' Backlit Troffer

LED

SPECIFICATION DATA

Project _____

Item Number _____

Prepared by _____ Date _____

ORDERING INFORMATION

Wattage	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	CRI ⁴	R9	Power Factor	THD	DUV	Operating Frequency	0-180° Spacing	90-270° Spacing
50	100-277	84,000	3500	4000K	83	23	>=.95	<15%	0.00093	50/60Hz	1.24	1.24

¹ Hours lifetime with 70% lumen maintenance


² Thermally stable typical lumens (±10%)

³ Thermally stable CCT (±10%)

⁴ Color rendering index/Ra

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54301141	836607008305	6.8" x 26.6" x 26.5"	12.2	1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

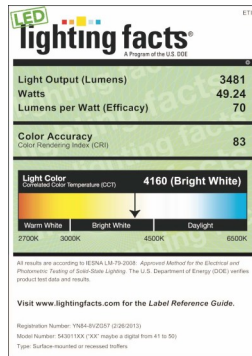

DESIGNLIGHTS
CONSORTIUM

The Americas Headquarters, 26650 Renaissance Parkway, STE 6 Cleveland, OH 44128

855-384-7754 www.etiled.us

Backlit Troffer


LED

46 watt 1' x 4' Backlit Troffer Specifications



The ETi Backlit LED Recessed Troffer offer a slim, low profile and easy to mount design. The luminaire provides for a brighter, lighter weight and more efficient replacement for standard fluorescent lay-in troffer used in recessed ceiling lights. Fixture is supplied with a 100-277v driver. Warranty period 5 years or 60 months. Suitable for installations from - 4° F to 104° F.

FIXTURE DIMENSIONS

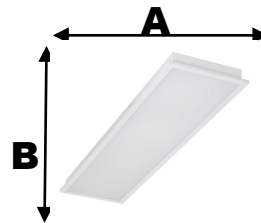

SKU# 54302141
Dimension A = 11.9"
Dimension B = 47.8"
Height = 2.5"
Does not include driver box



Driver box
Length = 8.0"
Width = 5.6"
Height = 1.8"

KEY FEATURES & BENEFITS

- 3,200 Lumens
- 85 CRI
- 4000k
- Universal 100-277v driver
- UL– Damp Location rated
- Reported L₇₀ hours 80,000 @55° C
- DesignLights Consortium® qualified



This light source meets restrictions on hazardous substances.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.etiled.us/fcc15b

APPLICATION INFORMATION

Ideal one-for-one replacement of conventional linear fluorescent lay-in troffers. Applications include; offices, education environments, healthcare, hotels, retail stores & commercial buildings.



855-384-7754 www.etiled.us

46w 1' x 4' Backlit Troffer LED

SPECIFICATION DATA

Project _____

Item Number _____

Prepared by _____ Date _____

ORDERING INFORMATION

Wattage	Input Voltage (VAC)	Average Rated Life ¹	Typical Lumens ²	CCT ³	CRI ⁴	R9	Power Factor	THD	DUV	Operating Frequency	0-180° Spacing	90-270° Spacing
46	100-277	80,000	3200	4000K	85	26.2	>=.95	<10%	.0011	50/60Hz	1.29	1.24

¹ Hours lifetime with 70% lumen maintenance


² Thermally stable typical lumens (±10%)

³ Thermally stable CCT (±10%)

⁴ Color rendering index/Ra

SHIPPING INFORMATION

Item Number	Item UPC	Item Dimensions (H x L x W)	Item Weight (lbs)	Inner Pack Qty	Inner Carton Bar Code	Inner Carton Dimensions (H x L x W)	Inner Pack Weight (lbs)	Master Pack Qty	Master Carton Bar Code	Master Dimensions (H x L x W)	Master Pack Weight (lbs)
54302141	836607008381	6.8" x 50.6" x	14.2	1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

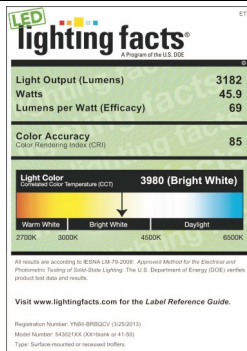

DESIGNLIGHTS 
CONSORTIUM

The Americas Headquarters, 26650 Renaissance Parkway, STE 6 Cleveland, OH 44128

855-384-7754 www.etiled.us