



SPECIFICATIONS
AR SERIES
 RANGE HOODS

HVI 2100 CERTIFIED 180 CFM/7.5 Sones @ 0.10" SP. Vertical

Dimensions

Overall bottom projection - 18³/₈"
 Overall top projection - 12"
 Height - 6"
 Available widths: 30" & 36"

Hood Body

23 gauge cold rolled steel, auto welded, coated with a baked enamel finish.

Motor

2 speed, single coil, thermally protected, permanently lubricated. Rated 120 volts, 60 hz.

Lighting

Single 60 watt cook light capacity (bulb not included).

Ducting Options


Vertical ducting: 7" round (duct collar built into hood).

Fan Blade


One piece polymeric, electronically balanced blade. 6⁵/₈" diameter with 5 paddles.

Electrical connection

Hood top - 7/8" electrical knockout.
 Hood back - 7/8" electrical knockout.

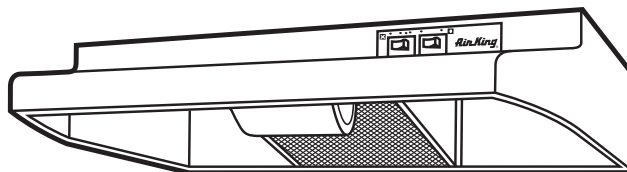

AR SERIES

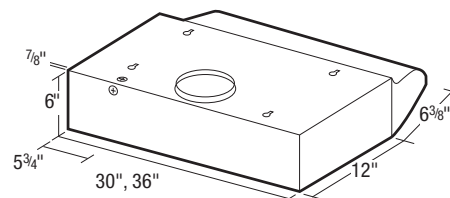

Filters

UL rated, class 2 filter.
 Grease Filter: RF35 - 8⁷/₈"x10³/₈" (included).

Available Finishes

White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Apms
	0	0.05	0.1	0.15	0.2	0.25				
Air Flow - CFM	203	191	180	148	124	101	7.5	2973	87.0	2.1

PROJECT					ARCHITECT				
LOCATION					ENGINEER				
CONTRACTOR					SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada: 8 Edvac Drive
 Brampton, Ontario L6S 5P2
 Tel: (905) 456-2033 • 800-250-8767
 Fax: (905) 456-1015