



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Pullout faucet spout provides infinite maneuverability for cleaning or rinsing
- Metal construction with various finishes identified by suffix
- Hydrolock® quick connect installation
- Pullout spray with 68" braided hose
- Flexible supplies with 3/8" compression fittings

## OPERATION

- Single handle lever
- When filling a vessel outside of the sink, the pause feature conveniently stops the flow of water as the wand passes over the countertop
- Convenient single-button actuation provides flexibility to switch from stream to spray mode
- Temperature controlled by 120° arc of handle travel
- Spout receptor rotation is 120°
- Operates with less than 5 lbs. of force

## FLOW

- Maximum flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

## CARTRIDGE

- 1255 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials

## STANDARDS


- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9
- Meets CalGreen and Georgia SB370 requirements

- **ADA**  for lever handle

- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

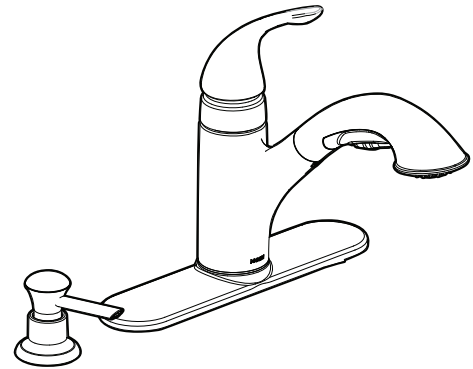

**Caprillo®**  
**Single Control Kitchen Faucet**

**Models:** CA87550 series

**NOTE:** DESIGNED TO INSTALL THROUGH  
1 OR 3 HOLES 1-1/2" (38mm) DIA.

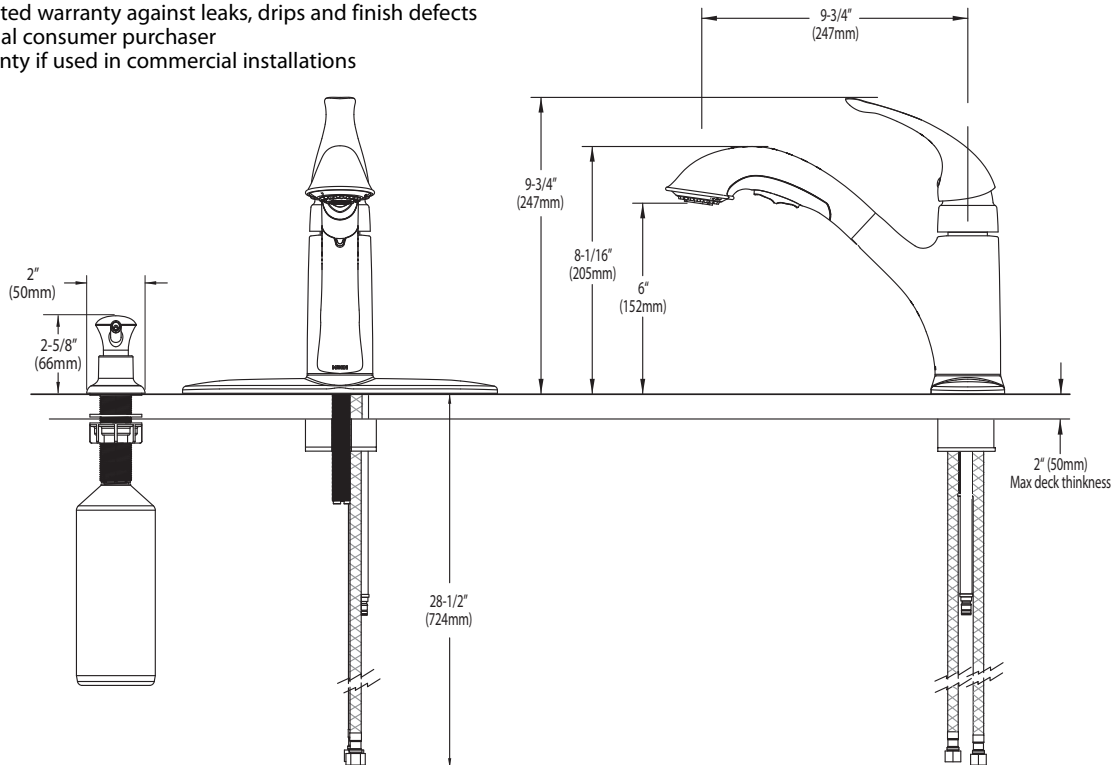

## CRITICAL DIMENSIONS

(DO NOT SCALE)