



SPECIFICATIONS
QZ SERIES
 RANGE HOODS

HVI 2100 CERTIFIED 250 CFM/5.5 Sones @ 0.10" SP. Horizontal
 260 CFM/6.0 Sones @ 0.10" SP. Vertical

Dimensions

Overall bottom projection - 18³/₈"
 Overall top projection - 12"
 Height - 6"
 Available widths: 30" & 36"

Hood Body

23 gauge cold rolled steel, auto welded, coated with a baked enamel finish.

Motor

Fully enclosed PSC 4 pole motor. Variable speed, thermally protected, permanently lubricated. Rated 115/120 Volts, 60 hz.

Lighting



Enclosed in a polycarbonate lens, 60 watt max. type A15 appliance lamp (bulb not included), complete with night light setting.

Ducting Options

Horizontal ducting: 3¹/₄"x10" (duct adapter and damper included).
 Vertical ducting: 3¹/₄"x10" (duct adapter and damper included).
 Vertical ducting: 7" round (duct adapter and damper not included).
 Ductless: removable front vent (charcoal filter not included).

Blade

Polymeric axial fan blade 9¹/₈" diameter with 7 paddles.

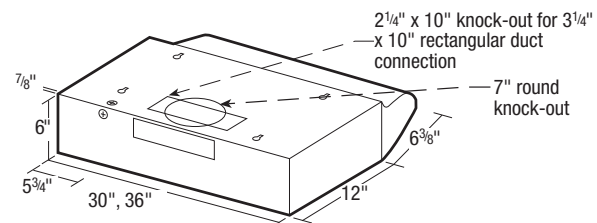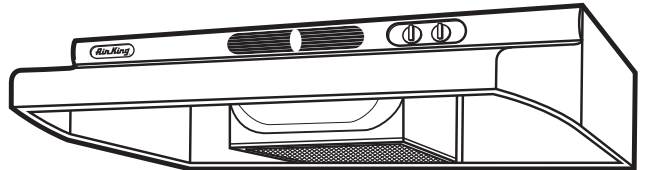

Electrical connection

Hood top - 7/8" knockout hole for use with 1/2" cable clamp
 Hood back - 7/8" knockout hole for use with 1/2" cable clamp

Filters

UL rated, class 2 filter.
 Grease Filter: GF-06, dishwasher safe (included).
 Charcoal Filter: CF-06 (not included).

Available Finishes

White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE												
Air Flow - CFM	Static Pressure (inches of w.g.)								Sones @ .1 SP	Fan Speed RPM	Power Watts	Amps
	0	0.05	0.1	0.15	0.2	0.25	0.3	0.35				
Vert Ducting High	294	279	260	250	238	213	184	151	6.0	2255	94	2.0
Horz Ducting High	292	274	250	238	225	195	165	135	5.5	2141	93	2.0
Vert Ducting Min	206	184	149	127	103	48	-	-	1.5	1579	32	
Horz Ducting Min	209	179	138	115	92	47	-	-	1.5	1499	32	

PROJECT							ARCHITECT					
LOCATION							ENGINEER					
CONTRACTOR							SUBMITTED BY				DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS			



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada: 8 Edvac Drive
 Brampton, Ontario L6S 5P2
 Tel: (905) 456-2033 • 800-250-8767
 Fax: (905) 456-1015